




Hybrid Cloud Video Security

Strengthen and simplify security at scale

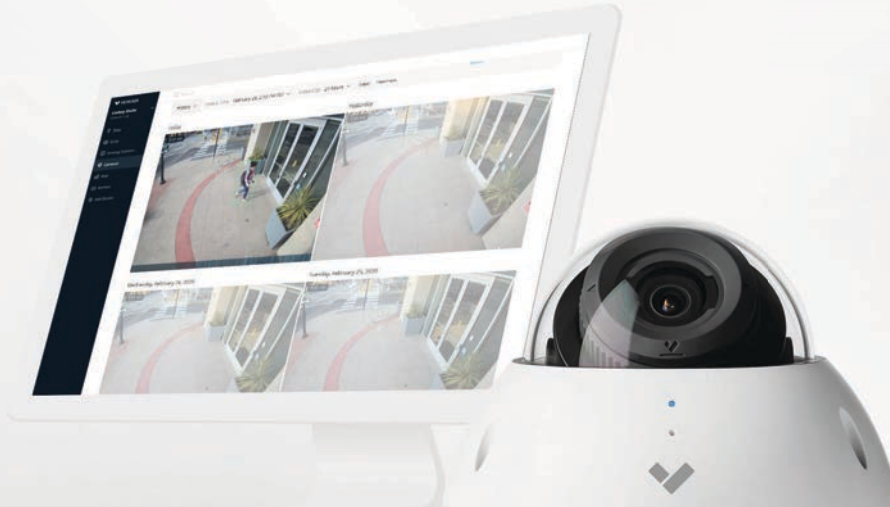

Overview

Verkada's line of hybrid cloud security cameras combines powerful edge-based processing with the limitless capabilities of cloud computing. With Verkada's hybrid cloud architecture, cameras analyze events in real-time, while simultaneously leveraging Verkada's industry-leading computer vision technology for instantaneous insights that bring speed and efficiency to incidents and investigations.

From Command, Verkada's centralized web-based platform, users can find the footage they need in seconds. With features like Motion Detection, People Analytics, and Vehicle Analytics, teams can quickly search across their organization to find relevant footage, eliminating the need to scrub through incidents manually.

All cameras have built-in onboard storage, including extended storage options up to 365 days of continuous recordings. With Verkada, organizations no longer need to worry about managing and maintaining devices like NVRs. Verkada cameras can self-manage, process and safely store footage locally on each device, while cloud-based archiving allows organizations to save and share as much footage as needed.


Available in a wide range of form factors, including indoor and outdoor models, Verkada security cameras work out-of-the-box without any additional downloads or configurations. Users can access events and associated footage from virtually anywhere from any device. Most importantly, without needing to open port forwards or setup VPNs, all Verkada traffic is automatically protected with **encryption in transit and at rest**.

Industry-Leading 10-Year Product Warranty

All Verkada hardware purchases are backed by our 10-year limited warranty. For more information, visit verkada.com/support/terms-of-sale.



Verkada's Hybrid Cloud Architecture

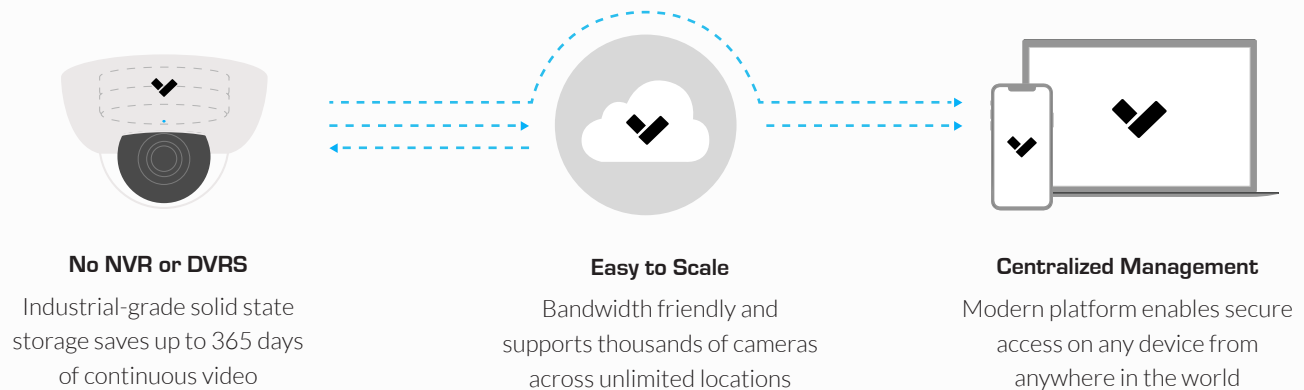

The reliability of on-camera solid-state storage, with the accessibility of the cloud

Simple to Install

- No NVRs, DVRs, or servers—just a PoE connection
- Cameras come online and configure in minutes
- No added software or complexities like port forwarding

Easy to Use

- Centralized management for seamless access anywhere
- No training required to access footage and features
- Find, download, and share footage from any device

Advantages of Cloud-Managed Solution

- Secure remote access on any device anywhere
- Real-time alerts if cameras fall offline
- SAML-based integration with single-sign on (SSO) solutions
- Continuous updates with new AI features
- Instantly share live footage via SMS and email
- Live, proactive alerting based on unusual activity
- People counting and heatmaps to visualize your space

Ready For Scale

- Bandwidth-friendly, using 5-20 Kbps per camera
- Scale to thousands of cameras across all locations
- No added equipment needed to support additional cameras

No Hidden Costs

- Hardware includes an industry-leading 10-year warranty
- Automatic firmware updates keep systems secure
- New features and enhancements are added at no additional costs

Video Security Hardware

Wide range of form factors built for any need



Dome Series

- Wide range of models for indoor and outdoor deployments
- Vandal-resistant form factors, including ratings of IK08 (indoor) and IK10/IP67 (outdoor)
- Image resolutions ranging from 2MP-4K
- Up to 365 days of onboard retention



Bullet Series

- Available in wide and telephoto lens options
- Waterproof IP67-rated hermetically sealed lens assembly, IK10-rated CNC aluminum housing for unmatched precision and durability
- Available in 5MP and 4K image resolutions
- Up to 365 days of onboard retention



Mini Series

- Discreet form factors for any environment
- High-resolution image quality with options for 5MP and 4K
- Up to 365 days of onboard retention




Fisheye Series

- 180° of panoramic views from all angles
- Ability to view captured area in separate quadrants
- High-resolution image quality with 12MP
- Up to 90 days of onboard video retention



Command Platform Overview

All-in-one cloud-based management software for Verkada security cameras

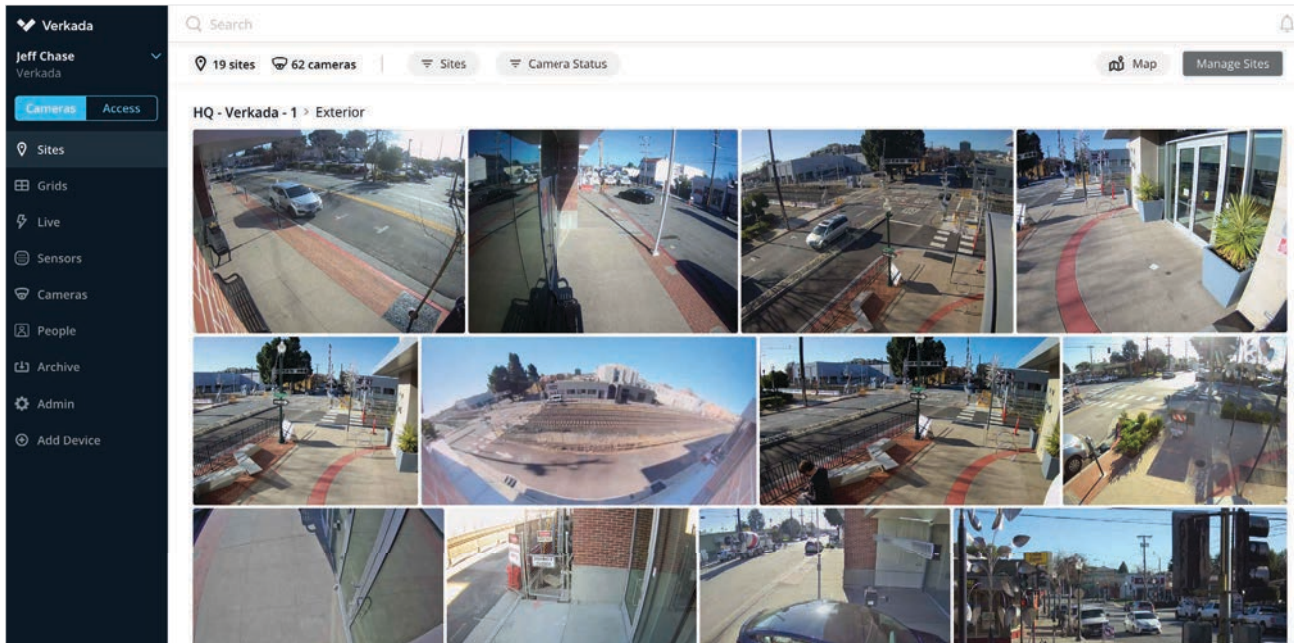

Command, Verkada's cloud-based management platform, is designed to deliver simple access and management for all cameras and users across every site from virtually anywhere in the world. From Command, users can set up new cameras, create new sites, manage settings, access live and archived footage, manage users, and access the advanced features powered by Verkada's edge-based analytics.

Security & Permissions

- SAML/OAuth support for single sign-on
- 2-factor authentication
- User permissions can be controlled at camera, site and organization levels

Remote Access

- Access from any device (desktops, smartphones, tablets)
- Native apps for iOS and Android, and Verkada's VX51 Viewing Station

Archiving and Sharing

- Unlimited cloud archiving
- Easily export any footage in a shareable MP4 format
- Create and share Live Links with first responders


Powerful Edge-Based Analytics

- Search footage by date, time, and motion
- Access People and Vehicle Analytics to simplify investigations



People Analytics

Simplify and speed up investigations with intelligent people and face detection

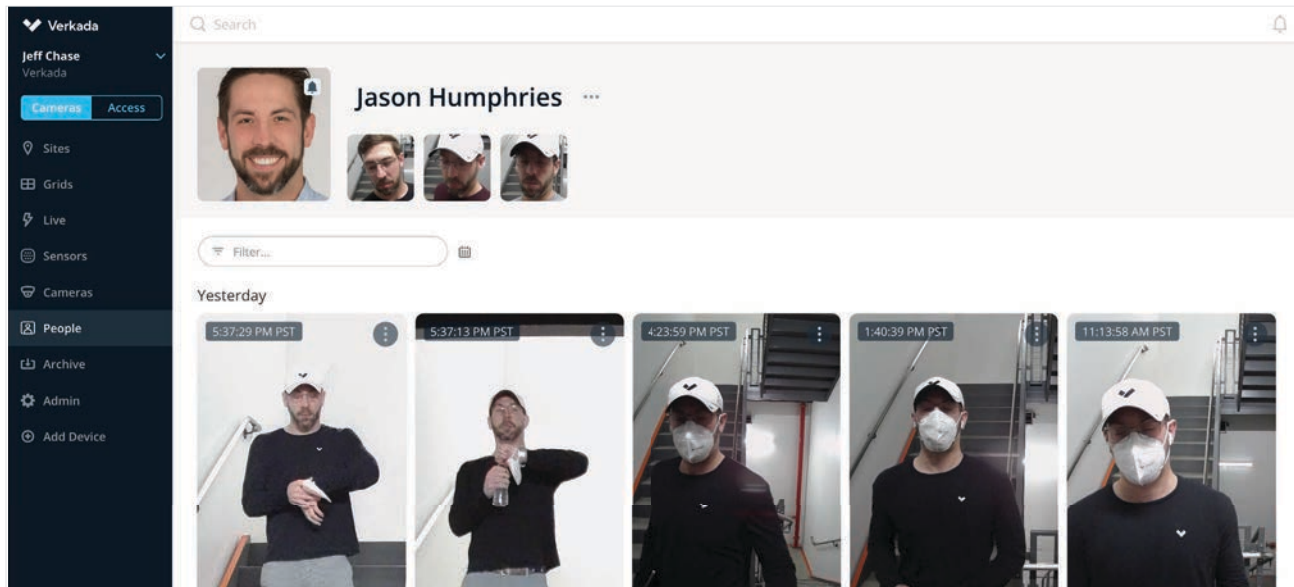

People Analytics combines intelligent edge-based video processing with computer vision in the cloud to give users high-quality images of all individuals identified in the scene. With Verkada's centralized management platform, customers can filter people by various attributes, including date, time, appearance, clothing color, backpack detection, and facial matches.

Bring Intelligence to Investigations

Face Search

- Quickly search for matching people by selecting an existing face from your organization or by uploading an image

Person History

- Browse through high-resolution snapshots of people detected in frame
- Save snapshots or easily access associated full-res video
- Search for matched people across your entire organization with cross-camera search.

Attribute Filters

- Filter based on a range of attributes, including clothing color, gender appearance, and facial matches.


Person of Interest Notifications

- Set up proactive SMS/email notifications for alerting when a matching face is detected by a camera
- Create a person of interest by using an uploaded image or an existing face from your organization



Vehicle Analytics & LPR

Quickly search and filter to find vehicles of interest

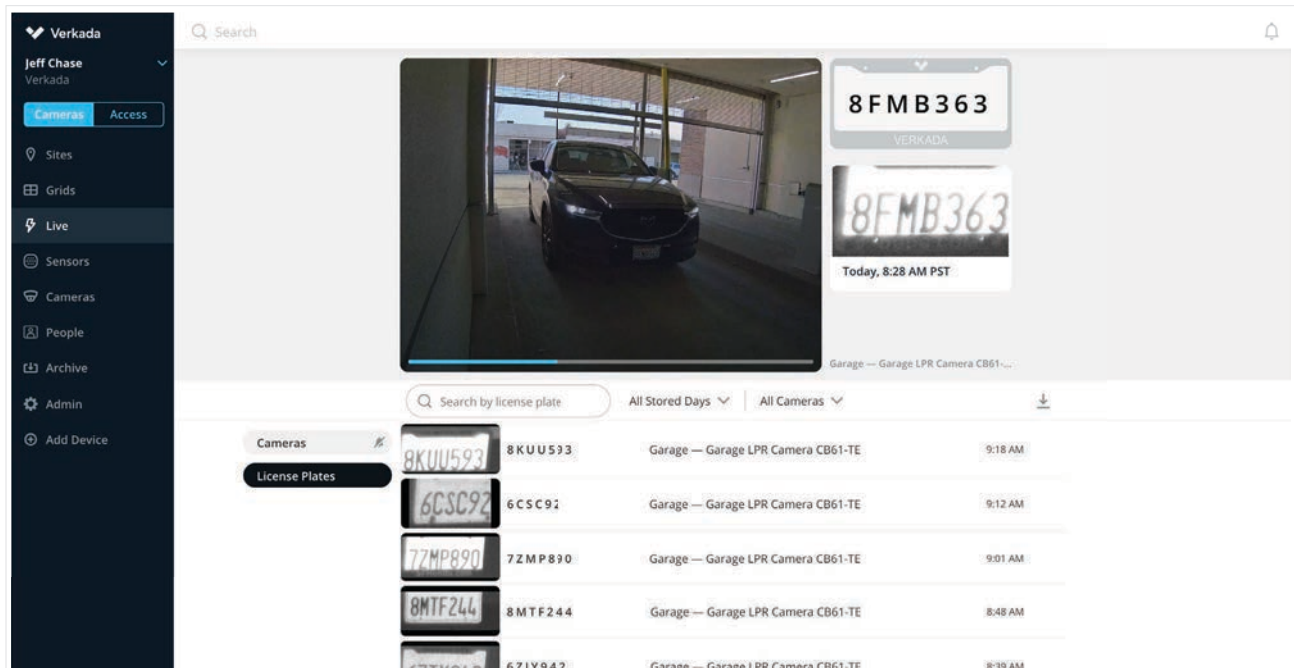

The screenshot displays the Verkada software interface for vehicle analytics. On the left is a dark sidebar with navigation options: Jeff Chase (Verkada), Cameras, Access, Sites, Grids, Live, Sensors, Cameras, People, Archive, Admin, and Add Device. The main area features a search bar at the top, a live video feed of a car in a garage, and a license plate recognition overlay showing '8FMB363' with the time 'Today, 8:28 AM PST'. Below the video, there is a search bar for license plates and a table of detected vehicles.

| License Plate | Vehicle ID | Location | Time |
|---------------|------------|------------------------------------|---------|
| 8KUU593 | 8KUU593 | Garage — Garage LPR Camera CB61-TE | 9:18 AM |
| 6CSC91 | 6CSC91 | Garage — Garage LPR Camera CB61-TE | 9:12 AM |
| 7ZMP890 | 7ZMP890 | Garage — Garage LPR Camera CB61-TE | 9:01 AM |
| 8MTF244 | 8MTF244 | Garage — Garage LPR Camera CB61-TE | 8:48 AM |
| 6Z1Y942 | 6Z1Y942 | Garage — Garage LPR Camera CB61-TE | 8:39 AM |

Vehicle Analytics provides teams with quick and easy search for finding vehicles of a particular color or type that has been spotted across their organization.

Additionally, with Verkada's Bullet Series, we offer an LPR feature that delivers real-time visibility of vehicles coming in and out a designated area.

Find and Filter Vehicles with Ease

Vehicle History

- Browse through high-resolution snapshots of vehicles detected in frame
- Save snapshots or easily access associated full-res video

Vehicle Filters

- Filter based on a range of attributes, including vehicle color and body type

Cross-Camera Tracking

- Easily find similar vehicles of interest across all cameras deployed across all sites
- Create and export playback of multiple angles of a vehicle to quickly provide evidence

License Plate Recognition

- Detect and search license plates captured across your entrances and parking lots
- Monitor all LPR activity from a live feed with immediate plate readings and context footage



Indoor Dome Series

| | | | | |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| |  CD31 |  CD41 |  CD51 |  CD61 |
| Image Resolution | 2MP (1920 x 1080) | 5MP (2688 x 1944) | 5MP (2688 x 1944) | 4K (3840 x 2160) |
| Lens Type | Fixed | | 3x Optical Zoom | |
| Image Sensor | 1/2.8" Progressive CMOS | | | |
| Focal Length | f=2.8mm | | f=2.8-8mm | |
| Iris | Fixed | | P-Iris | |
| Aperture | F1.6 | | F1.3-F2.4 | |
| Field of View | Horizontal: 97° Vertical: 71° Diagonal: 128° | | Horizontal: 38° to 105° Vertical: 29° to 77° Diagonal: 48° to 126° | Horizontal: 41° to 116° Vertical: 23° to 62° Diagonal: 47° to 136° |
| IR Range | 15m / 50ft in low light | | 30m / 98ft in low light | |
| Resistance Rating | IK08, FCC, IEC60950-1 | | | |
| Dimensions | With mount plate: Ø: 146mm / 5.75in, H: 104.3mm / 4.11in; 736g / 25.96oz Without mount plate: Ø: 146mm / 5.75in, H: 99.8mm / 3.93in; 593g / 20.92oz | | | |
| Operating Specs | Power: 11W (IEEE 802.3af PoE) Temperature: -10°C - 50°C (14°F - 122°F) Humidity: 90% | | | |
| Connectivity | Ethernet: 10/100Mbps RJ-45 cable connector for Network/PoE connection | | | |



Outdoor Dome Series

| |  CD31-E |  CD41-E |  CD51-E |  CD61-E |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Image Resolution | 2MP (1920 x 1080) | 5MP (2688 x 1944) | 5MP (2688 x 1944) | 4K (3840 x 2160) |
| Lens Type | Fixed | | 3x Optical Zoom | |
| Image Sensor | 1/2.8" Progressive CMOS | | | |
| Focal Length | f=2.8mm | | f=2.8-8mm | |
| Iris | Fixed | | P-Iris | |
| Aperture | F1.6 | | F1.3-F2.4 | |
| Field of View | Horizontal: 97° Vertical: 71° Diagonal: 128° | | Horizontal: 38° to 105° Vertical: 29° to 77° Diagonal: 48° to 126° | Horizontal: 41° to 116° Vertical: 23° to 62° Diagonal: 47° to 136° |
| IR Range | 15m / 50ft in low light | | 30m / 98ft in low light | |
| Resistance Rating | IK10, IP67, FCC, IEC60950-1 | | | |
| Dimensions | With mount plate: Ø: 155mm / 6.1in, H: 114.6mm / 4.51in ; 996g / 35.13oz Without mount plate: Ø: 155mm / 6.1in, H: 107.6mm / 4.24in ; 818g / 28.85oz | | | |
| Operating Specs | Power: 12W (IEEE 802.3af PoE) ; Extended Temperature Range: 20W (IEEE 802.3at PoE) Temperature: -20°C - 50°C / -4°F - 122°F, PoE 802.3af ; -40°C - 50°C / -40°F - 122°F, PoE 802.3at Humidity: 90% | | | |
| Connectivity | Ethernet: 10/100Mbps RJ-45 cable connector for Network/PoE connection | | | |



Mini Series

| | | | |
|--------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| |  CM41 |  CM41-E |  CM61 |
| Image Resolution | 5MP (2688 x 1944) | 5MP (2688 x 1944) | 4K (3840 x 2160) |
| Lens Type | Fixed | | |
| Image Sensor | 1/2.8" Progressive CMOS | | 1/1.8" Progressive CMOS |
| Focal Length | f=2.8mm | | f=4.57mm EFL (at infinity) |
| Iris | Fixed | | |
| Aperture | F1.6 | | F1.7 |
| Field of View | Horizontal: 97° Vertical: 71° Diagonal: 128° | | Horizontal: 102.3° Vertical: 55.1° Diagonal: 120.4° |
| IR Range | 15m / 49ft in low light | | |
| Resistance Rating | IK08 | IK10/IP67/IP6K9K | N/A |
| Dimensions | Ø: 100mm x 63mm / 3.94 x 2.48 inches | Ø: 121mm x 72mm / 4.78x 2.83 inches | Ø: 101mm x 57mm / 3.98 x 2.24 inches |
| Operating Specs | Power: 6W (IEEE 802.3af PoE) Temperature: -10°C - 50°C (14°F - 122°F) Humidity: 90% | Power: 12W (IEEE 802.3af PoE) Temperature: -40°C - 55°C (-40°F - 122°F) Humidity: 90% | Power: 6W (IEEE 802.3af PoE) Temperature: -10°C - +45°C (14°F - 113°F) Humidity: 90% |
| Connectivity | 10/100Mb RJ-45 Cable Connector for Network/PoE Connection | | |







Bullet Series

| |  CB51-E |  CB61-E |  CB51-TE |  CB61-TE |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Image Resolution | 5MP (2688 x 1944) | 4K (3840 x 2160) | 5MP (2688 x 1944) | 4K (3840 x 2160) |
| Lens Type | Optical Zoom | | Optical Zoom | |
| Image Sensor | 1/2.8" Progressive CMOS | | | |
| Focal Length | f=2.8mm-8mm | | f=8mm-20mm | |
| Iris | P-Iris | | | |
| Aperture | F1.3-F2.4 | | F1.5-F2.8 | |
| Field of View | Horizontal: 41°-95° Vertical: 40°-59° Diagonal: 50°-105° | Horizontal: 42°-95° Vertical: 25°-48° Diagonal: 49°-100° | Horizontal: 15.9°-38.9° Vertical: 12.2°-29.2° Diagonal: 18°-46° | Horizontal: 17°-41.8° Vertical: 10°-23.8° Diagonal: 21°-52° |
| IR Range | 30m / 98ft in low light | | 50m / 164ft in low light | |
| Resistance Rating | IK10, IP67 | | | |
| Dimensions | Ø: 81 L: 263mm with mountplate | | | |
| Operating Specs | Power: 12W (IEEE 802.3af PoE), 20W (IEEE 802.3at PoE) Temperature: -20°C - 50°C (14°F - 122°F), 802.3af / -40°C - 50°C (-40°F - 122°F), 802.3at Humidity: 90% | | | |
| Connectivity | 10/100Mb RJ-45 Cable Connector for Network/PoE Connection | | | |







Ordering Information | Indoor Dome Series

| Product Name | Days | SKU | Lens | Price (MSRP) |
|--------------------------------------------------------------------------------------------------------|------|-------------|-------|--------------|
|  <p>CD31</p> | 15 | CD31-15-HW | Fixed | \$599 |
|  <p>CD41</p> | 30 | CD41-30-HW | Fixed | \$799 |
| | 60 | CD41-60-HW | Fixed | \$1,199 |
| | 90 | CD41-90-HW | Fixed | \$1,599 |
| | 120 | CD41-120-HW | Fixed | \$1,999 |
| | 365 | CD41-365-HW | Fixed | \$2,999 |
|  <p>CD51</p> | 30 | CD51-30-HW | Zoom | \$999 |
| | 60 | CD51-60-HW | Zoom | \$1,399 |
| | 90 | CD51-90-HW | Zoom | \$1,799 |
| | 120 | CD51-120-HW | Zoom | \$2,199 |
| | 365 | CD51-365-HW | Zoom | \$3,199 |
|  <p>CD61</p> | 30 | CD61-30-HW | Zoom | \$1,399 |
| | 60 | CD61-60-HW | Zoom | \$2,299 |
| | 90 | CD61-90-HW | Zoom | \$3,199 |







Ordering Information | Outdoor Dome Series

| Product Name | Days | SKU | Lens | Price (MSRP) |
|----------------------------------------------------------------------------------------------------------|------|--------------|-------|--------------|
|  <p>CD31-E</p> | 15 | CD31-15E-HW | Fixed | \$799 |
|  <p>CD41-E</p> | 30 | CD41-30E-HW | Fixed | \$999 |
| | 60 | CD41-60E-HW | Fixed | \$1,399 |
| | 90 | CD41-90E-HW | Fixed | \$1,799 |
| | 120 | CD41-120E-HW | Fixed | \$2,199 |
| | 365 | CD41-365E-HW | Fixed | \$3,199 |
|  <p>CD51-E</p> | 30 | CD51-30E-HW | Zoom | \$1,199 |
| | 60 | CD51-60E-HW | Zoom | \$1,599 |
| | 90 | CD51-90E-HW | Zoom | \$1,999 |
| | 120 | CD51-120E-HW | Zoom | \$2,399 |
| | 365 | CD51-365E-HW | Zoom | \$3,399 |
|  <p>CD61-E</p> | 30 | CD61-30E-HW | Zoom | \$1,599 |
| | 60 | CD61-60E-HW | Zoom | \$2,499 |
| | 90 | CD61-90E-HW | Zoom | \$3,399 |






Ordering Information | Bullet Series

| Product Name | Days | SKU | Lens | Price (MSRP) |
|-----------------------------------------------------------------------------------------------------------|------|---------------|------------------|--------------|
|  <p>CB51-E</p> | 30 | CB51-30E-HW | Zoom (Wide) | \$1,399 |
| | 60 | CB51-60E-HW | Zoom (Wide) | \$1,799 |
| | 90 | CB51-90E-HW | Zoom (Wide) | \$2,199 |
| | 365 | CB51-365E-HW | Zoom (Wide) | \$3,599 |
|  <p>CB61-E</p> | 30 | CB61-30E-HW | Zoom (Wide) | \$1,799 |
| | 60 | CB61-60E-HW | Zoom (Wide) | \$2,699 |
| | 90 | CB61-90E-HW | Zoom (Wide) | \$3,599 |
|  <p>CB51-TE</p> | 30 | CB51-30TE-HW | Zoom (Telephoto) | \$1,499 |
| | 60 | CB51-60TE-HW | Zoom (Telephoto) | \$1,899 |
| | 90 | CB51-90TE-HW | Zoom (Telephoto) | \$2,299 |
| | 365 | CB51-365TE-HW | Zoom (Telephoto) | \$3,699 |
|  <p>CB61-TE</p> | 30 | CB61-30TE-HW | Zoom (Telephoto) | \$1,899 |
| | 60 | CB61-60TE-HW | Zoom (Telephoto) | \$2,799 |
| | 90 | CB61-90TE-HW | Zoom (Telephoto) | \$3,699 |



Ordering Information | Mini Series




| Product Name | Days | SKU | Lens | Price (MSRP) |
|--------------------------------------------------------------------------------------------------------|------|--------------|-------|--------------|
|  <p>CM41</p> | 30 | CM41-30-HW | Fixed | \$799 |
| | 60 | CM41-60-HW | Fixed | \$1,199 |
| | 90 | CM41-90-HW | Fixed | \$1,599 |
| | 120 | CM41-120-HW | Fixed | \$1,999 |
| | 365 | CM41-365-HW | Fixed | \$2,999 |
|  <p>CM41-E</p> | 30 | CM41-30E-HW | Fixed | \$999 |
| | 60 | CM41-60E-HW | Fixed | \$1,399 |
| | 90 | CM41-90E-HW | Fixed | \$1,799 |
| | 365 | CM41-365E-HW | Fixed | \$3,199 |
|  <p>CM61</p> | 30 | CM61-30-HW | Fixed | \$1,199 |
| | 60 | CM61-60-HW | Fixed | \$2,099 |
| | 90 | CM61-90-HW | Fixed | \$2,999 |

Ordering Information | Fisheye Series

| Product Name | Days | SKU | Lens | Price (MSRP) |
|-------------------------------------------------------------------------------------------------------|------|-----------|-------|--------------|
|  <p>D80</p> | 30 | D80-30-HW | Fixed | \$1,899 |
| | 60 | D80-60-HW | Fixed | \$2,599 |
| | 90 | D80-90-HW | Fixed | \$3,299 |



Ordering Information | D-Series

| Product Name | Days | SKU | Lens | Price (MSRP) |
|------------------------------------------------------------------------------------------------------|------|---------------|-------|--------------|
|  <p>D30</p> | 30 | D30-HW | Zoom | \$799 |
| | 60 | D30-60DAY-HW | Zoom | \$1,199 |
| | 90 | D30-90DAY-HW | Zoom | \$1,599 |
| | 120 | D30-120DAY-HW | Zoom | \$1,999 |
|  <p>D40</p> | 30 | D40-HW | Fixed | \$799 |
| | 60 | D40-60DAY-HW | Fixed | \$1,199 |
| | 90 | D40-90DAY-HW | Fixed | \$1,599 |
| | 120 | D40-120DAY-HW | Fixed | \$1,999 |
|  <p>D50</p> | 30 | D50-HW | Zoom | \$999 |
| | 60 | D50-60DAY-HW | Zoom | \$1,399 |
| | 90 | D50-90DAY-HW | Zoom | \$1,799 |
| | 120 | D50-120DAY-HW | Zoom | \$2,199 |

Ordering Information | Video Security Cloud License


| Product Name | Description | Cost Per Camera (MSRP) |
|--------------|--------------------------------|------------------------|
| LIC-1Y | Verkada 1 Year Camera License | \$199 |
| LIC-3Y | Verkada 3 Year Camera License | \$499 |
| LIC-5Y | Verkada 5 Year Camera License | \$799 |
| LIC-10Y | Verkada 10 Year Camera License | \$1,599 |



Ordering Information | Extended Cloud Storage

| Product Name | Description | Cost Per Camera (MSRP) |
|----------------|------------------------------------------------|------------------------|
| LIC-CLD-60-1Y | Verkada 1 Year Cloud Storage License - 60 Day | \$199 |
| LIC-CLD-90-1Y | Verkada 1 Year Cloud Storage License - 90 Day | \$299 |
| LIC-CLD-120-1Y | Verkada 1 Year Cloud Storage License - 120 Day | \$399 |
| LIC-CLD-180-1Y | Verkada 1 Year Cloud Storage License - 180 Day | \$599 |
| LIC-CLD-365-1Y | Verkada 1 Year Cloud Storage License - 365 Day | \$1,199 |

Ordering Information | Environmental Sensor

| Product Name | Description | Price (MSRP) |
|-------------------------------------------------------------------------------------------------------|------------------------------------|--------------|
|  SV11-HW | SV11 Environmental Sensor Hardware | \$999 |
| LIC-SV-1Y | 1 Year Sensor License | \$249 |
| LIC-SV-3Y | 3 Year Sensor License | \$599 |
| LIC-SV-5Y | 5 Year Sensor License | \$999 |
| LIC-SV-10Y | 10 Year Sensor License | \$1,999 |



Ordering Information | Viewing Station

| Product Name | Description | Price (MSRP) |
|--------------|-----------------------------------------|--------------|
| VX51-HW | Verkada VX51 Viewing Station | \$1,999 |
| LIC-VX-1Y | Verkada 1 Year Viewing Station License | \$499 |
| LIC-VX-3Y | Verkada 3 Year Viewing Station License | \$1,299 |
| LIC-VX-5Y | Verkada 5 Year Viewing Station License | \$1,999 |
| LIC-VX-10Y | Verkada 10 Year Viewing Station License | \$3,999 |

Ordering Information | Camera Accessories

| Product Name | Description | Price (MSRP) |
|--------------|-------------------------------------------|--------------|
| ACC-MNT-2 | Verkada Arm Mount | \$89 |
| ACC-MNT-3 | Verkada L-Bracket Mount | \$129 |
| ACC-MNT-4 | Verkada Pole Mount | \$199 |
| ACC-MNT-5 | Verkada Mini Pendant Cap Mount | \$79 |
| ACC-MNT-6 | Verkada Mini Junction Box Mount | \$79 |
| ACC-MNT-7 | Verkada Angle Mount | \$149 |
| ACC-MNT-8 | Verkada Pendant Cap Mount | \$69 |
| ACC-MNT-9 | Verkada Pole Mount, 2nd Generation | \$209 |
| INJ-POE-PLUS | Verkada PoE Plus (802.3at) Injector, GigE | \$129 |

Industry-Leading 10-Year Product Warranty

All Verkada hardware purchases are backed by our 10-year limited warranty. For more information, visit verkada.com/support/terms-of-sale.

